


3 Megapixel progressive scan CMOS



Features

- 1/3" 3 Megapixel progressive scan CMOS
- Support H.264/MJPEG dual codec
- Smart triple streams supported
- Max 25/30fps@3MP(2048x1536)
- Ultra WDR (Wide Dynamic Range) up to 120dB
- Ultra 3D DNR
- Ultra Defog, ROI, EIS
- Smart detection: Face detection, Tripwire detection, Intrusion detection, Scene change detection
- Auto back focus
- 100/1000M Base-T Ethernet
- Micro SD memory, PoE

Dimensions

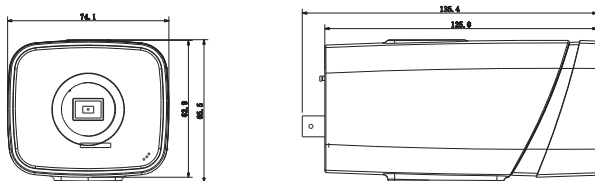

Specifications

Model	KB-BX3	
Camera		
Image Sensor	1/3" 3Megapixel CMOS	
Effective Pixels	2048(H)x1536(V)	
Scanning System	Progressive	
Electronic Shutter Speed	Auto/Manual, 1/4~1/10000s	
Min. Illumination	0.1Lux/F1.2(Color), 0.01Lux/F1.2(B/W)	
S/N Ratio	More than 50dB	
Camera Features		
Day/Night	Auto(ICR)/Color/B/W	
Backlight Compensation	BLC / HLC / WDR 120dB	
White Balance	Auto/Manual	
Gain Control	Auto/Manual	
Noise Reduction	3D	
EIS	Support	
Ultra Defog	Support	
Lens		
Mount Type	C/CS	
Video		
Compression	H.264/MJPEG	
Resolution	3M(2048×1536)/1080P(1920×1080)/720P(1280×720)/D1(704×576)/CIF(352×288)	
Frame Rate	Main Stream	3M/1080P (1~25/30fps)
	Sub Stream	D1/CIF(1 ~ 25/30fps)
	Third Stream	1080P/720P/D1(1 ~ 25/30fps)
Bit Rate	H.264: 48K ~ 8192Kbps	
Network		
Ethernet	RJ-45 (100/1000Base-T)	
Compatibility	ONVIF, PSIA, CGI	
Auxiliary Interface		
Memory Slot	Micro SD, Max 64GB	
Alarm	2/1 channel In/Out	
General		
Power Supply	DC12V/AC24V, PoE (802.3af)	
Working Environment	-30°C~+60°C, Less than 95% RH	
Dimensions	74.1mm×65.5mm×135.4mm	
Weight	0.3Kg	