

# KX-C4K8104SN2

## 4 Channel Compact 1U 1HDD NVR

Design and specifications are subject to change without notice. Pictures in the document are for reference only, and the actual product shall prevail.



- New 4.0 user interface, Security baseline 2.1
- H.264, H.265, Smart H.264+, and Smart H.265+. H.265 auto switch
- Max. decoding capability: 4 × 1080p@30 fps. Supports adaptive decoding
- Supports mainstream cameras of ONVIF and RTSP protocols
- P2P remote surveillance, video play on mobile device
- VGA/HDMI simultaneous video output, maximum resolution of HDMI is 4K
- AI by Camera: Face detection, perimeter protection, IVS, people counting, heat map, and SMD
- Supports remote configuration and management of IPC, such as setting parameters, getting information, and upgrading IPC of the same model in batches



| System                         |  |
|--------------------------------|--|
| Main Processor                 | Industrial-grade embedded processor  |
| OS                             | Embedded Linux   |
| Operation Interface            | Web/operating in local GUI   |
| Perimeter Protection by Camera |  |
| Performance                    | 4 channels   |
| AI Search                      | Search for pictures by channel, time and event type  |
| Face Detection by Camera       |  |
| Performance                    | 4 channels   |
| Face Attributes                | 6 attributes: Gender, age, glasses, expression, mouth mask, and beard                        |
| AI Search                      | Search for pictures by channel, time and face attributes                                     |
| SMD Plus by Camera             |  |
| Performance                    | 4 channels   |
| AI Search                      | Search by target classification (human, vehicle)   |
| Video                          |  |
| Access Channel                 | 4  |
| Network Bandwidth              | Access: 80 Mbps; Storage: 80 Mbps; Forward: 60 Mbps  |
| Resolution                     | 8MP; 6MP; 5MP; 4MP; 3MP; 1080p; 720p; D1   |
| Decoding Capability            | 4 × 1080p@30 fps   |
| Video Output                   | 1 × VGA output, 1 × HDMI output, supports simultaneous video sources output for VGA and HDMI |
| Multi-screen Display           | 1, 4 views   |
| Third-party Camera Access      | ONVIF; RTSP  |
| Compression                    |  |
| Video                          | Smart H.265/H.265/Smart H.264/H.264/MJPEG  |
| Audio                          | PCM/G711A/G711U/G726/AAC   |

| Network                |  |
|------------------------|--|
| Network Protocol       | HTTP; HTTPS; TCP/IP; IPv4/IPv6; UPnP; SNMP; RTSP; UDP; SMTP; NTP; DHCP; DNS; IP Filter; DDNS; FTP; Alarm Server; IP Search (Support KBVISION IP camera; DVR; NVS; etc.); P2P; autoregister |
| Mobile Phone Access    | Android; iOS   |
| Interoperability       | ONVIF (profile T/S/G); CGI; SDK  |
| Browser                | Chrome; IE9 or later; firefox  |
| Record Playback        |  |
| Multi-channel Playback | Up to 4 channels for playback  |
| Record Mode            | Manual record; alarm recording; SMD recording; smart recording   |
| Storage                | Local HDD; network   |
| Backup                 | USB storage device   |
| Playback Function      | 1. Play/pause/stop/slow/quick/backward/by frame<br>2. Full screen, backup (video clip/file), partial zoom in, and audio on/off   |
| Storage                |  |
| Disk Group             | Yes  |
| Alarm                  |  |
| General Alarm          | Motion detection, privacy masking, video loss, scene changing, PIR alarm, IPC external alarm   |
| Anomaly Alarm          | Camera disconnection, storage error, disk full, IP conflict, MAC conflict, login locked, and cybersecurity exception   |
| Intelligent Alarm      | Face detection, perimeter protection (intrusion and tripwire), IVS, people counting, heat map, and SMD alarms  |
| Alarm Linkage          | Recording, snapshot, audio, buzzer, log, preset, and email   |
| External Port          |  |
| Audio Input            | 1 × RCA input  |
| Audio Output           | 1 × RCA output   |

## KX-C4K8104SN2

### 4 Channel Compact 1U 1HDD NVR


Design and specifications are subject to change without notice. Pictures in the document are for reference only, and the actual product shall prevail.

|         |  |
|---------|--|
| HDD     | 1 SATA III ports, up to 10 TB for a single HDD. The maximum HDD capacity varies with environment temperature |
| USB     | 2 (1 × front USB2.0; 1 × back USB2.0)  |
| HDMI    | 1 (supports up to 4K resolution output)  |
| VGA     | 1  |
| Network | 1 × RJ-45, 10/100 Mbps self-adaptive Ethernet port   |

| General Parameter    |  |
|----------------------|--|
| Power Supply         | 12 V DC, 2 A   |
| Power Consumption    | < 10 W (HDD not included, idling)                                |
| Net Weight           | 0.81 kg (1.79 lb)  |
| Gross Weight         | 1.41 kg (3.11 lb)  |
| Product Dimensions   | 260 mm × 232.5 mm × 50.3 mm (10.24" × 9.15" × 1.98") (W × L × H) |
| Package Dimensions   | 89 mm × 333 mm × 315 mm (3.50" × 13.11" × 12.40") (W × L × H)    |
| Operating Conditions | -10 °C to +55 °C (+10 °F to +131 °F)                             |
| Storage Conditions   | 0 °C to +40 °C (32 °F to 104 °F)                                 |
| Operating Humidity   | 10%~93%  |
| Storage Humidity     | 30%~85%  |

|                    |                     |
|--------------------|---------------------|
| Operating Altitude | 3000 m (9842.52 ft) |
| Installation       | Desktop mounted     |

#### Panels

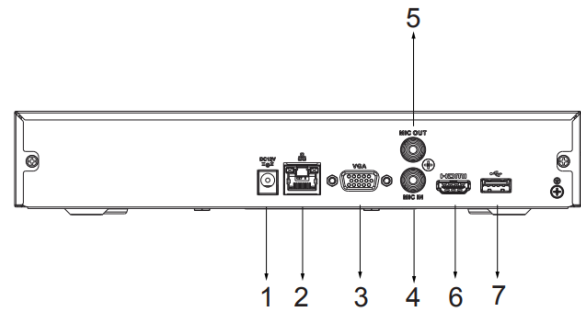

- |   |                          |   |                         |
|---|--------------------------|---|-------------------------|
| 1 | DC 12V Power Input       | 2 | Network Port            |
| 3 | VGA Port                 | 4 | AUDIO IN, RCA Connector |
| 5 | AUDIO OUT, RCA Connector | 6 | HDMI Port               |
| 7 | USB Port                 |   |                         |