

KX-DAi8216H3

16 Channel Penta-brid 5M-N/1080P 1U 2HDDs DVR

Design and specifications are subject to change without notice.
Pictures in the document are for reference only, and the actual product shall prevail.



- H.265+/H.265 dual-stream video compression
- Supports Full-channel AI Coding
- Supports HDCVI/AHD/TVI/CVBS/IP video inputs
- Max 24 channels IP camera inputs, each channel up to 6MP; Max 128 Mbps incoming bandwidth
- Up to 2 channels video stream (analog channel) Perimeter Protection
- Up to 16 channels video stream (analog channel) SMD Plus
- Up to 2 channels video stream (analog channel) human face recognition
- IoT & POS functionalities



| System | |
|---|--|
| Main Processor | Embedded processor |
| Operating System | Embedded Linux |
| Perimeter Protection | |
| Perimeter Performance AI by Recorder (Number of Channels) | 2 channels |
| Face Detection | |
| Face Attributes | 6 attributes: Gender, age groups (6), glasses, expressions (8), face mask, beard, with up to four detection panels displayed at the same time. |
| Face Detection Performance of AI by Recorder (Number of Channels) | 2 channels, and a single channel can detect up to 12 faces. |
| Face Recognition | |
| Face Database Capacity | Up to 10 face databases and 10,000 pictures. |
| Face Recognition Performance of AI by Recorder (Number of Channels) | 2 channels |
| SMD Plus | |
| SMD Plus by Recorder | Full-channel SMD Plus (AI by recorder), secondary filtering for human and motor vehicle SMD Plus, reducing false alarms caused by leaves, rain and lighting condition change |
| Audio and Video | |
| Analog Camera Input | 16 channels, BNC: adaptive access by default; HDCVI, AHD, TVI and CVBS access can be configured. |
| Camera Input | 1. CVI: 5MP, 4MP, 1080p@25/30 fps, 720p@50/60 fps, 720p@25/30 fps. 2. TVI: 5MP, 4MP, 3MP, 1080p@25/30, 720p@25/30 fps. 3. AHD: 5MP, 4MP, 3MP, 1080p@25/30, 720p@25/30 fps. |
| IP Camera Input | 16+8 channels, each channel up to 6MP |
| Encoding Capacity | All channel 5M-N (1 fps~10 fps); 4M-N/1080p (1 fps~15 fps); 1080N/720p/960H/D1/CIF (1 fps~25/30 fps) |

| Dual-stream | Supported (D1/CIF (1 fps~15 fps)). |
|---------------------------|--|
| Video Frame Rate | PAL: 1 fps~25 fps. NTSC: 1 fps~30 fps. |
| Video Bit Rate | 32 Kbps~6144 Kbps Per Channel |
| Audio Sampling | 8 KHz, 16 bit Per Channel |
| Audio Bit Rate | 64 Kbps Per Channel |
| Bit Rate Type | Video stream and composite stream. |
| Video Output | 1 HDMI, 1 VGA VGA: 1920 × 1080, 1280 × 1024, 1280 × 720 HDMI: 3840 × 2160, 1920 × 1080, 1280 × 1024, 1280 × 720 It changes to 1920 × 1080, 1280 × 1024, 1280 × 720 when Face or IVS&SMD is selected in AI Mode. |
| Multi-screen Display | When IP extension mode not enabled: 1/4/8/9/16 When IP extension mode enabled: 1/4/8/9/16/25 |
| Third-party Camera Access | Onvif, RTSP, Panasonic, Sony, Axis, Arecont, Pelco, Canon, Samsung |
| Compression Standard | |
| Video Compression | AI Coding/H.265+/H.265/H.264+/H.264 |
| Audio Compression | G.711A/G.711u/PCM |
| Network | |
| Network Protocol | HTTP, HTTPS, TCP / IP, IPv4, RTSP, UDP, SMTP, NTP, DHCP, DNS, DDNS, P2P |
| Mobile Phone Access | iPhone, iPad, Android |
| Interoperability | ONVIF 16.12, CGI Conformant |
| Browser | Chrome, IE9 or above, Firefox |
| Network Mode | Single-address mode |
| Recording Playback | |
| Record Mode | Manual, Schedule (General, Continuous), MD (Video detection: Motion Detection, Video Loss, Tampering), Alarm, Stop |
| Recording Playback | 1/4/9/16 It changes to 1/4/9 split when Face or IVS&SMD is selected in AI Mode. |
| Backup Method | USB Device/Network |

KX-DAi8216H3


16 Channel Penta-brid 5M-N/1080P 1U 2HDDs DVR

Design and specifications are subject to change without notice.
Pictures in the document are for reference only, and the actual product shall prevail.

| | |
|-------------------|--|
| Playback Mode | Instant playback, general playback, event playback, tag playback, smart playback (face and motion detection) |
| Storage | |
| Disk Group | Yes |
| Alarm | |
| General Alarm | Motion detection, Video Loss, tampering, and local alarm |
| Anomaly Alarm | No disk, disk error, low space, offline, ip conflict, MAC conflict |
| Intelligent Alarm | Face detection, face recognition, perimeter protection |
| Alarm Linkage | Record, snapshot (panoramic), IPC external alarm output, access controller, voice prompt, buzzer, log, preset, email |
| Ports | |
| Audio Input | 1, RCA (external) 16, BNC (coaxial) |
| Audio Output | 1, RCA |
| Two-way Talk | Yes (share the same audio input with the first channel) |
| HDD Interface | 2 SATA Ports, up to 16TB for a single HDD, the maximum HDD capacity varies with environment temperature |
| RS-485 | 1 Port, for PTZ Control |
| USB | 2 USB Ports (1 USB 2.0 , 1 USB 3.0) |
| HDMI | 1 |
| VGA | 1 |
| Network Port | 1 (10/100/1000 Mbps Ethernet port, RJ-45) |
| General | |
| Power Supply | DC12V, 4A |

| | |
|-----------------------|--|
| Power Consumption | Lower than 12 W |
| Net Weight | 1.56 kg (3.44 lb) |
| Gross Weight | 2.86 kg (6.31 lb) |
| Product Dimensions | 1U, 375.0 mm × 289.0 mm × 53.0 mm (W × D × H) 14.76" × 11.38" × 2.09" (W × D × H) |
| Packaging Dimensions | 433.0 mm × 141.0 mm × 366.0 mm (L × W × H) 17.05" × 5.55" × 14.41" (L × W × H) |
| Operating Temperature | -10 °C to +55 °C (+14 °F to +131 °F) |
| Operating Humidity | 10%–90% |
| Installation | Desktop |

Panels

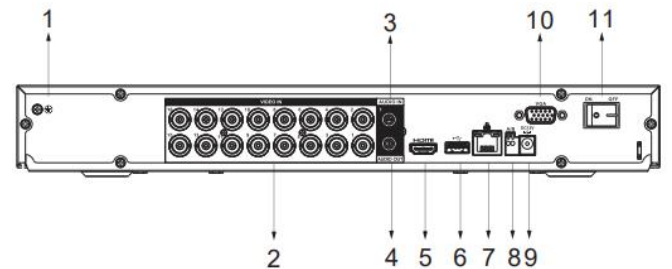

- | | |
|---------------------------|----------------------------|
| 1 Ground | 2 VIDEO IN |
| 3 AUDIO IN, RCA Connector | 4 AUDIO OUT, RCA Connector |
| 5 HDMI Port | 6 USB Port |
| 7 Network Port | 8 RS-485 Port |
| 9 Power Input | 10 VGA Port |
| 11 Power Switch | |