

KX-E4K816128N2

128 Channel 3U 16HDDs Network Video Recorder

Design and specifications are subject to change without notice. Pictures in the document are for reference only, and the actual product shall prevail.



- New 4.0 user interface
- 16-channel decoding @1080p (30 fps); self-adaptive decoding capability
- Access, storage or forwarding at 384 Mbps
- Simultaneous video output for VGA and HDMI1; 4K heterogeneous output for the 2 HDMI ports
- Multiple data mode such as Raid0, Raid1, Raid5, Raid6, and Raid10
- Remote configuration and management of IPCs, such as setting parameters, acquiring information and upgrading IPCs of the same model in batches
- AI-by-camera functions such as perimeter protection, face detection and recognition, SMD Plus, video metadata, ANPR and 3D behavior analysis
- N+M cluster. When the host fails, the standby device will continue to record; once the host recovers, video recorded on the standby device will be transmitted back



System	
Main Processor	Industrial embedded micro-processor
Operating System	Embedded LINUX
Operating Interface	Web mode, local GUI
Perimeter Protection by Camera	
Performance	24 channels
AI Search	Search pictures by channel, time, event type
Face Recognition by Camera	
Performance	24 channels
Face Attributes	6 attributes: Gender, age, glasses, expression, mouth mask, and beard
AI Search	Search pictures by channel, time and face attributes
SMD Plus By Camera	
Performance	32 channels
AI Search	Search by target classification (Human, Vehicle)
Video Metadata By Camera	
Performance	12 channels
Human Body	Top, top color, bottom, bottom color, hat, bag, gender, age, umbrella
Vehicle	Plate No., type, color, vehicle type, logo, plate color, ornament, calling, seatbelt, region
Non-motor Vehicle	Type, color, number of passengers, helmet
AI Search	Support search target video by metadata
ANPR by Camera	
Performance	8 channels
Stereo Analysis by Camera	
Performance	32 channels

AI Search	Search by target classification (Fall Detection, People Approach Detection, People No. Exception Detection, People Staying Detection, Violence Detection)
Video	
Access Channel	128
Network Bandwidth	384 Mbps for access, 384 Mbps for storage and 384 Mbps for forwarding
Resolution	12 MP/8 MP/6 MP/5 MP/4 MP/3 MP/1080p/960p/720p/D1/CIF/QCIF
Decoding Capability	16-ch@1080p (30 fps)
Video Output	VGA: 1920 × 1080, 1280 × 1024, 1280 × 720 HDMI1/HDMI2: 3840 × 2160@30 fps, 3840 × 2160 @25 fps, 1920 × 1080, 1280 × 1024, 1280 × 720 1 channel VGA output, 2 channels HDMI output, VGA and HDMI 1 homologous output, double HDMI heterogeneous output. Support 4K display for both HDMI1 and HDMI2
Multi-screen Display	1st Screen: 1/4/8/9/16/25/36/64 2nd Screen: 1/4/8/9/16
Third Party Camera Access	Panasonic, Sony, Samsung, Axis, Pelco, Arecont, Onvif, Canon and more
Compression	
Video	Smart H.265+/H.265/Smart H.264+/H.264/MPEG4/MJPEG
Audio	MP2/G726/G729/G722/G723/G711A/G711U/PCM
Network	
Network Protocol	HTTP, HTTPS, TCP/IP, IPv4/IPv6, UPnP, SNMP, RTSP, UDP, SMTP, NTP, DHCP, DNS, IP Filter, PPPoE, DDNS, FTP, Alarm Server, IP Search (Support KBVISION IP camera, DVR, NVS, etc.), P2P, iSCSI
Mobile Phone Access	iOS, Android
Interoperability	ONVIF (profile T/S/G), CGI, SDK


KX-E4K816128N2

128 Channel 3U 16HDDs Network Video Recorder

Design and specifications are subject to change without notice. Pictures in the document are for reference only, and the actual product shall prevail.

Browser	Chrome, IE9 or later, Firefox
Record Playback	
Multi-channel Playback	1/4/9/16
Record Mode	Manual, Schedule (General, MD (Motion Detection), Alarm, MD & Alarm, Intelligent, POS)
Storage Method	Local HDD and network
Backup	Hard drive, USB device, eSATA device
Playback Function	1. Play, pause, stop, fast forward, fast backward, rewind, play by frame 2. Full screen, backup (cut/file), partially enlarge, audio on/off
Storage	
Disk Group	Support
Raid Support	RAID 0/1/5/6/10
Alarm	
General Alarm	Motion detection, privacy masking, video loss, local alarm, PIR alarm, IPC alarm
Anomaly Alarm	Camera offline, storage error, full storage, IP conflict, MAC conflict, login lock, network security anomaly
Intelligent Alarm	Perimeter protection, face detection, face recognition, SMD, video metadata (human, motor-vehicle, non-motor vehicle), ANPR, people counting, stereo analysis, crowd distribution, heatmap
Alarm Linkage	Record, snapshot, IPC external alarm output, buzzer, log, preset, email
External Port	
Audio Input	1 channel, RCA connector
Audio Output	1 channel, RCA connector
HDD	16 SATA III ports, up to 10 TB for a single HDD. The maximum HDD capacity varies with environment temperature. Supports Hot-swap.
Alarm Input	16 channels
Alarm Output	8 channels
eSATA	1 eSATA
SAS	1 Mini SAS Port, for Storage Expansion
RS-232	1 channel, used to debug and pass through serial data
RS-485	1 channel, used to control PTZ, and it supports multiple protocols
USB	2 front USB 2.0 ports, 2 rear USB 3.0 ports

HDMI	2
VGA	1
Network	6 in total, 4 × RJ45 10/100/1000 Mbps self-adaptive Ethernet ports and 2 × 1000 Mbps optical port
General Parameter	
Power Supply	Single, AC100V–240V, 50–60 Hz
Power Consumption	< 51 W (Without HDD)
Net Weight	17.6 kg (38.8 lb) (Without HDD)
Gross Weight	27 kg (59.5 lb) (Without HDD)
Product Dimensions	485 mm × 516.5 mm × 133.2 mm (W × L × H) 19.09 inch × 20.34 inch × 5.24 inch (W × L × H)
Package Dimensions	648 mm × 723 mm × 445 mm (W × L × H) 25.51 inch × 28.46 inch × 17.52 inch (W × L × H)
Operating Conditions	–10°C to +55°C (+14°F to +131°F), +35°C (+95°F) when raid enabled
Storage Conditions	0°C to +40°C (+32°F to +104°F)
Operating Humidity	10%–93% (RH)
Storage Humidity	30%–85% (RH)
Operating Altitude	3000 m (9843 ft)
Panels	

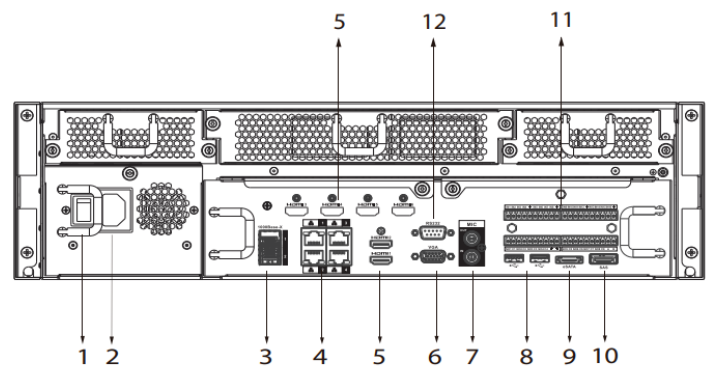

- | | |
|-------------------------------|-----------------|
| 1 Power Switch | 2 Power Input |
| 3 Optical Fiber Ports | 4 Network Ports |
| 5 HDMI Ports | 6 VGA Port |
| 7 AUDIO IN/OUT, RCA Connector | 8 USB Ports |
| 9 eSATA Port | 10 SAS Port |
| 11 Alarm In/Out | 12 RS-232 Port |