

KX-VDP01GN

IP Villa Outdoor Station



Features


- HD CMOS camera
- Tempered glass panel, IP65
- Night vision & Voice indication
- Video & Audio messaging
- Remote intercom with mobile APP
- Surface mounted




Technical Specification

Model	KX-VDP01GN
System	
Main Processor	Embedded Micro Processor
Operation System	Embedded LINUX OS
Video	
Video Compression	H.264
Image Sensor	1/4" 1MP CMOS
Lens	3.6mm
Angle of View	D:70° H:60°
Day/Night	Color Image
Audio	
Audio Compression	G.711
Audio Input	Omnidirectional Mic
Audio Output	Built-in Speaker
Bidirectional Talk	Support Dual-way Bidirectional talk
Operation Mode	
Keypad	Single Touch Button
Reader	Mifare Card
Interface	
Door Control	2(1 relay out for main lock, 1 extended by access control module)
Alarm In	2(1ch unlock button, 1ch feedback)
RS485	1
Network	
Ethernet	10M/100Mbps Self-adaptive
Network Protocol	TCP/IP
General	
Ingress Protection	IP65
Tamper Switch	1
Installation	Surface
Material	Tempered Glass
Power	DC 12V
Power Consumption	Standby ≤1W, Work ≤10W
Working Temperature	-30°C~+60°C
Relative Humidity	10%-90%RH
Dimensions	154.2mm×114.2mm×43.0mm
Weight	0.6Kg

Dimensions

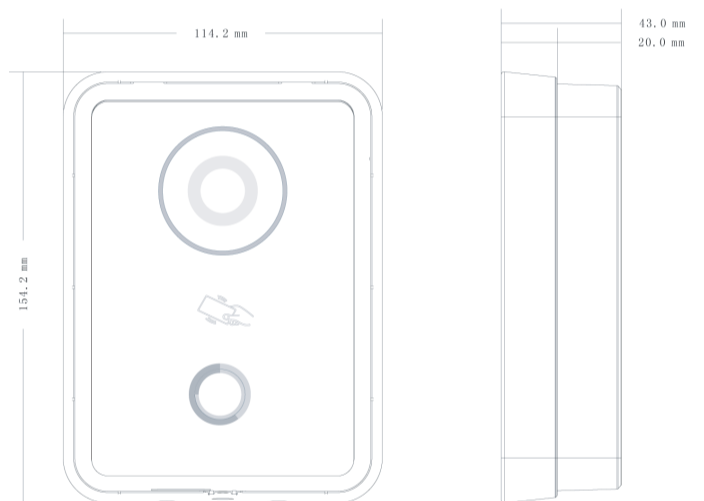

View Area

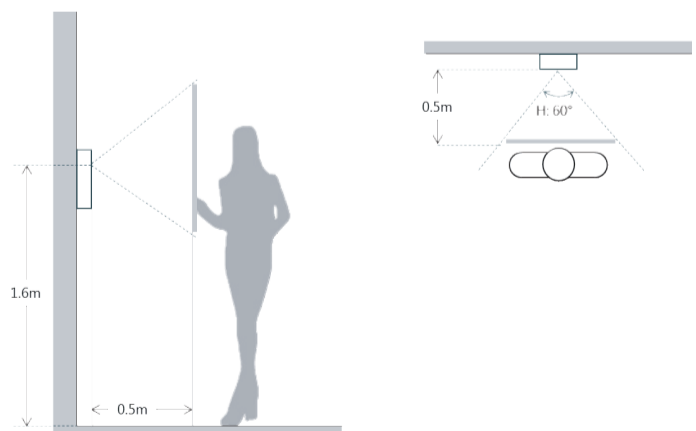

KX-VDP01GN

IP Villa Outdoor Station

Application

